


# Filter Sheets

## Technical Features

### Technical Features of the Dorsan® Filter Sheets

	Weight gsm	Thickness mm	Water Value at 100 kPa	Micro Rating µm	Filtration Degree
KA-05	675 - 825	3.85 - 4.35	8218 - 14665	40 - 50	Coarse
KA-01	700 - 855	3.35 - 3.80	5738 - 10203	25 - 30	Coarse
KA-295	1080 - 1320	3.95 - 4.45	764 - 1358	25 - 30	Coarse
KA-1	615 - 755	2.00 - 2.30	2254 - 4006	20 - 25	Coarse
KA-3	720 - 880	3.10 - 3.50	5271 - 9374	7 - 11	Coarse
KA-035	945 - 1155	3.55 - 4.00	1119 - 1989	4 - 7	Coarse
KA-5	800 - 900	2.10 - 2.30	326 - 489	3.5 - 5.0	Coarse
KA-10	1030 - 1270	3.50 - 4.00	485 - 885	2.5 - 3.5	Clarification
KA-11	1110 - 1360	3.50 - 4.00	240 - 505	2.0 - 3.0	Clarification
KA-12	1200 - 1400	3.40 - 3.80	110 - 150	1.0 - 2.25	Clarification
KA-15	1192 - 1455	3.30 - 3.70	81 - 143	0.80 - 1.00	Fine Clarification
KA-25	1300 - 1500	3.70 - 3.90	69 - 81	0.69 - 0.81	Steril
KA-30	1400 - 1600	3.50 - 4.00	50 - 65	0.40 - 0.60	Steril
KA-40	1350 - 1550	3.70 - 3.90	43 - 52	0.25 - 0.45	Super Steril
KA-50	1500 - 1700	3.90 - 4.10	10 - 16	0.04 - 0.20	Super Steril

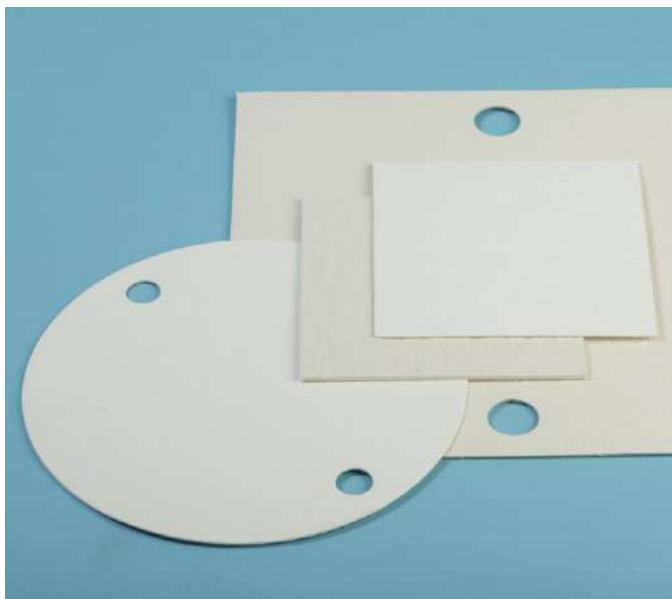

**Disclaimer:** This list is for internal use and is made as a guidance product to our customers. To create it we have taken into account the parameters of physical characteristics, filterability and retention capabilities.

All indicated data to be understood as typical average values.  
 This product is manufactured in conformance with the  
 Quality Management standard DIN EN ISO 9001.  
 We reserve the right to change these informations  
 without any previous notice.  
 v01 © Dorsan Filtration

**DORSAN®**  
 LIVING FILTRATION